
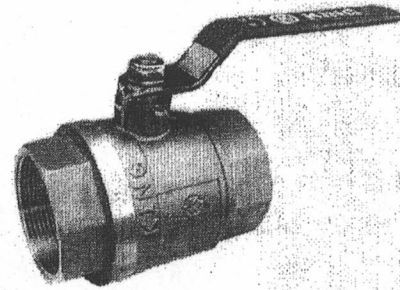


# KING VALVE

## 201 201A 201C BRASS BALL VALVE (THREADED)

- Pressure Rating: PN20, 600 WOG
- Working Medium: Water, Oil, Gas
- Working Temperature:  $t \leq 170^{\circ}\text{C}$
- Uk End Connection: BS21
- Us End Connection: NPT

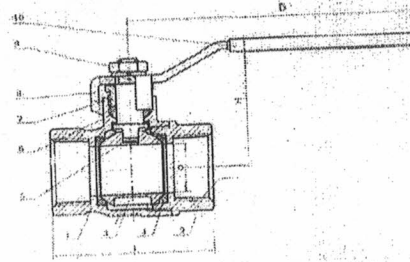

### Bill of Materials

Sequence	Description	Material	Sizes
1	Body	Brass CW617N	All
2	Seat Retainer	Brass CW617N	All
3	Ball	Brass CW617N	All
4	Seat	P.T.F.E	All
5	Stem	Brass CW617N	All
6	Packing	P.T.F.E	All
7	Gland Nut	Brass CW617N	All
8	Lever	Mild Steel (Chrome Plated)	All
9	Lever Nut	Stainless Steel	All
10	Lever Cover	PVC	All



### Dimensions

201					201A		201C		
DN	d	L	H	D	DN	d	L	H	D
15	12.7	58	48	95	15	14	51	44	95
20	15	65	51	110	20	19	55	51	110
25	20	78	56	110	25	24	70	55	110
32	25	85	64	140	32	31	85	65	140
40	32	98	68	140	40	38	91	70	140
50	40	116	81	160	50	49	105	83	160

- 201 BRASS BALL VALVE
- 201A BRASS BALL VALVE
- 201C BRASS BALL VALVE (Chrome Plated)

## 206 BRASS BALL VALVE (FLANGED)

- Pressure Rating: PN16
- Working Medium: Water, Oil, Gas
- Working Temperature:  $t \leq 170^{\circ}\text{C}$
- Uk End Connection: Flanged BS4504

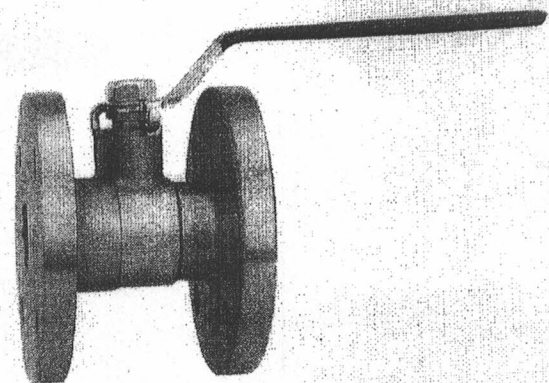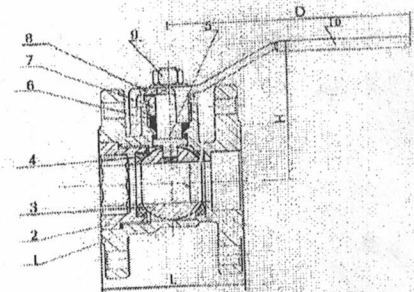

### Bill of Materials

Sequence	Description	Material	Sizes
1	Body	Brass CW617N	All
2	Seat Retainer	Brass CW617N	All
3	Ball	Brass CW617N	All
4	Seat	P.T.F.E	All
5	Stem	Brass CW617N	All
6	Packing	P.T.F.E	All
7	Gland Nut	Brass CW617N	All
8	Lever	Mild Steel (Chrome Plated)	All
9	Lever Nut	Steel (Chrome Zinc)	All
10	Lever Cover	PVC	All

### Dimensions

DN	L	H	D
20	72	73	160
25	76	76	160
32	76	86	174
40	82	93	174
50	89	101	174
65	96	123	168
80	106	131	189
100	126	143	230

206 BRASS BALL VALVE